
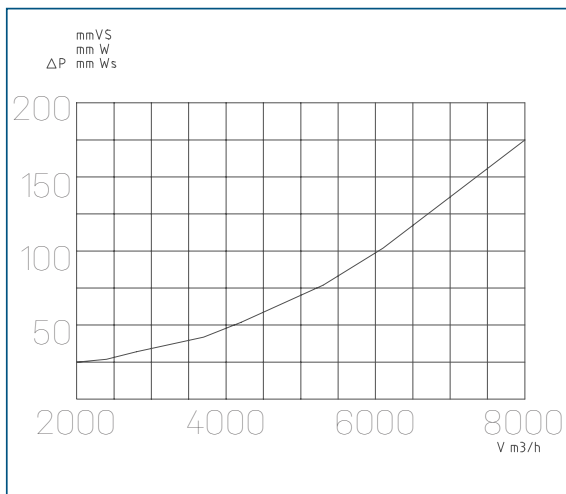


GR 250X

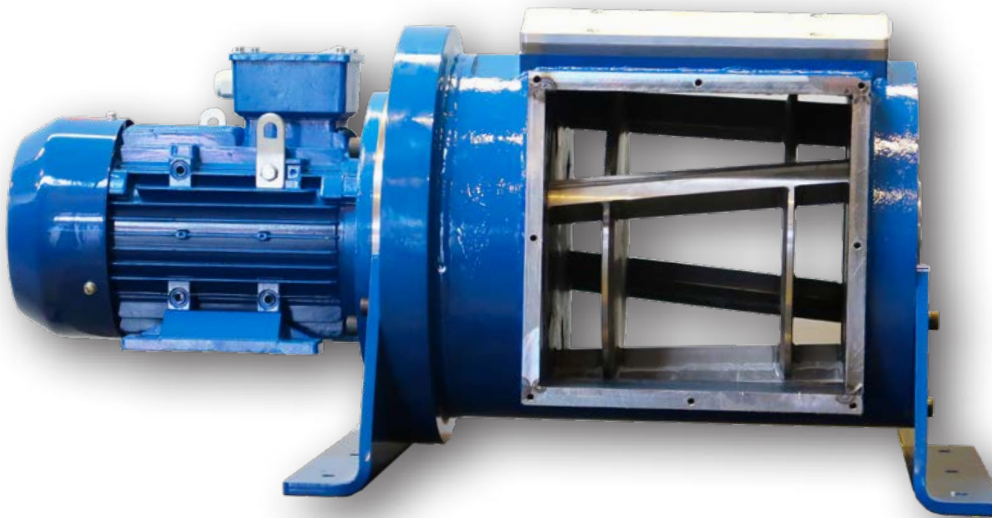

INFORMATION

Granulator housing	High-carbon steel
Motor standard	3,00kW (4 HP) type M100, 1400/2800 rpm
Power	3 Phase, 230-460V, 50-60 Hz
Nom. amperage	6,30A
Fuse	16 Amp.
Knives	Hard-metal
Piping	Dia. 200-400 mm (8" - 16")
Transmission	Direct coupling
Weight incl. motor	205 kg (452 lbs)
Weight excl. motor	180 kg (397 lbs)
Colour	Ral 5010
Minimum thickness	20 microns (0.0007")